


**Compashield® splice quality requirements:**

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.  
 No flash, porosity or excess rubber at the joint after splicing.  
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.  
 Joining point should stand for 10% stretch without mechanical damage

**Cross-section area**7,94 mm<sup>2</sup>**Electrial resistance measure:**

Methode: Nolato R3 Max: 300 mOhm

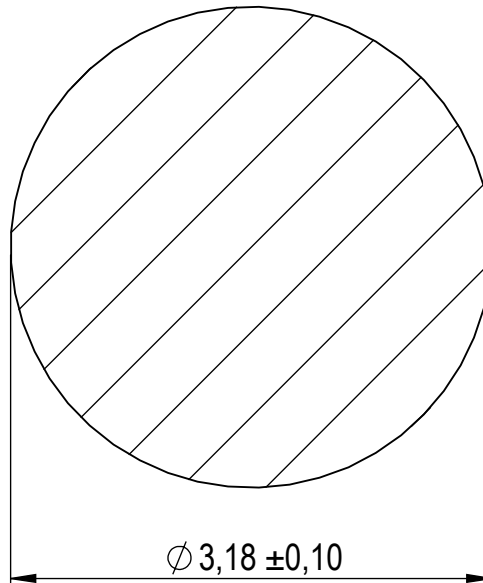


Art.nr	Material	Length	Weight/m	Splice
1153800	8642	Roll	20 g	No

## REVISIONS

REV.	DATE	DESCRIPTION

**Nolato**

Document name



1st angle projection

Sheet scale  
20:1Sheet size  
A4Document no.  
P1538:10:001Rev no.  
BNolato art. no.  
1153800

General tolerances

Drawn by  
T.NilssonChecked by  
P.ÅDate  
2017-05-30

Reference cad data

Compashield Solid O-shape 1153800