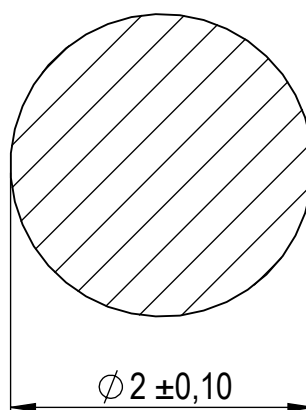


Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area3,14 mm²**Electrial resistance measure:**


Methode: Nolato R3 Max: 300 mOhm

 $\phi 2 \pm 0,10$

Art.nr	Material	Length	Weight/m	Splice
1160300	8642	Roll	7g	No
1160301		433 ±2 mm		Yes
1160302		437 ±2 mm		Yes
1160303		300 ±2 mm		No


REVISIONS

REV.	DATE	DESCRIPTION



Document name

Compashield Solid O-shape



1st angle projection

Sheet scale
20:1Sheet size
A4Document no.
P1603:10:001Rev no.
BNolato art. no.
1160300

General tolerances

Drawn by
T.NChecked by
O.EDate
2010-04-27

SS ISO 3302-1 M3

Reference cad data

1160300 B Compashield Solid O-shape