

Compashield® splice quality requirements:



No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
No flash, porosity or excess rubber at the joint after splicing.
Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
Joining point should stand for 10% stretch without mechanical damage

Cross-section area

11 mm²

Electrial resistance measure:


Methode: Nolato R3 Max: N/A

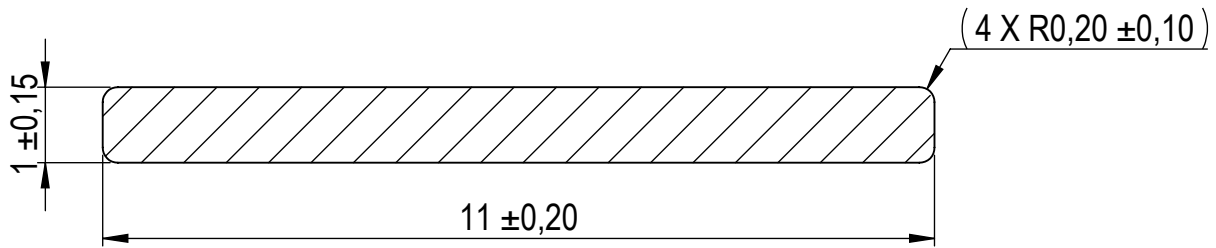


Nolato Silikonteknik

Art.nr	Material	Length	Weight/m	Splice
1265200	1540	Roll	12,10	No

REVISIONS		
REV.	DATE	DESCRIPTION

	Document name			
	Compashield Solid Square			

	Sheet scale 10:1	Sheet size A4	Document no. P2652:16:001	Rev no. B	Nalato art. no. 1265200
---	---------------------	------------------	------------------------------	--------------	----------------------------

General tolerances	Drawn by K.L	Checked by P.Å	Date 2015-03-05
--------------------	-----------------	-------------------	--------------------

SS ISO 3302-1 M3	Reference cad data 1265200 B COMPASHIELD SOLID SQUARE		
------------------	--	--	--