

Compashield® splice quality requirements:



No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
No flash, porosity or excess rubber at the joint after splicing.
Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
Joining point should stand for 10% stretch without mechanical damage

Cross-section area

38,5 mm²

Electrial resistance measure:

Methode: Nolato R3 Max: N/A

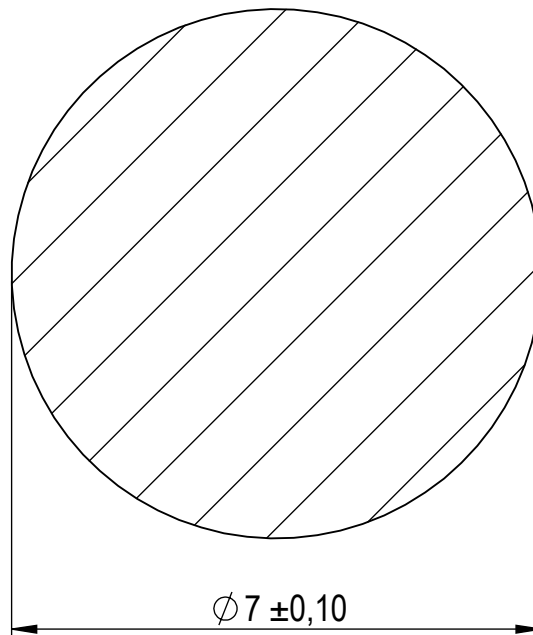

Nolato Silikonteknik

Art.nr	Material	Length	Weight/m	Splice
1267000	1540	Roll	42,3g	No
1267001		962 ± 5 mm		Yes

REVISIONS		
REV.	DATE	DESCRIPTION

	Document name				
	Compashield Solid O-shape				

	Sheet scale	Sheet size	Document no.	Rev no.	Nolato art. no.
	10:1	A4	P2670:16:001	A	1267000

General tolerances	Drawn by	Checked by	Date
	O.E	K.L	2016-07-05

Reference cad data
SS ISO 3302-1 M3
1267000 A Compashield Solid O-shape