

Compashield® splice quality requirements:


No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
No flash, porosity or excess rubber at the joint after splicing.
Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
Joining point should stand for 10% stretch without mechanical damage

Cross-section area

3,14 mm²

Electrial resistance measure:


Methode: Nolato R3 Max: N/A

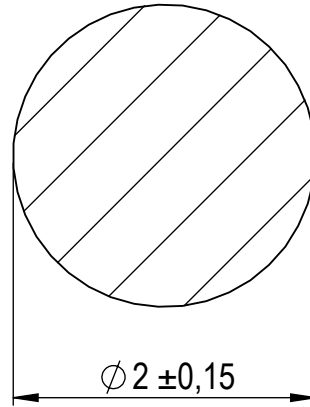


Nolato Silikonteknik

Art.nr	Material	Length	Weight/m	Splice
1276900	1540	Roll	3,46 g	No
1276901		911 ± 5 mm		Yes
1276902		90 ± 2 mm		Yes

REVISIONS		
REV.	DATE	DESCRIPTION

 Nolato	Document name			
	Compashield Solid O-shape			

	Sheet scale 20:1	Sheet size A4	Document no. P2769:16:101	Rev no. B	Nolato art. no. 1276900
---	----------------------------	-------------------------	-------------------------------------	---------------------	-----------------------------------

General tolerances	Drawn by K.L	Checked by P.Å	Date 2016-11-23
--------------------	------------------------	--------------------------	---------------------------

SS ISO 3302-1 M3	Reference cad data 1276900 B COMPASHIELD SOLID O-SHAPE
------------------	--