

Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
No flash, porosity or excess rubber at the joint after splicing.
Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
Joining point should stand for 10% stretch without mechanical damage


Cross-section area

2.22mm ^2



Electrial resistance measure:

Methode: Nolato R3 Max:300 mOhm

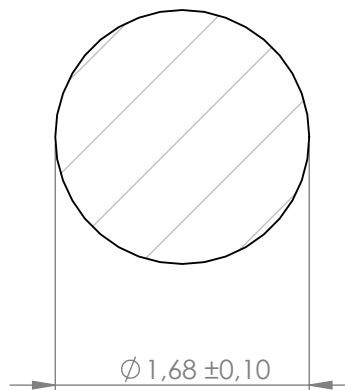

A

A

B

B

C

C

D

D

E

E

F

F

Art.nr	Material	Lenght	Weight/m	Splice
1153600	8642	Roll	5g	No

REVISIONS		
REV.	DATE	DESCRIPTION



Document name
Compashield Solid O-shape

	Sheet scale 20:1	Sheet size A4	Document no. P1536:10:001	Rev no. B	Nolato art. no. 1153600	Customer no.
General tolerances SS-ISO 2768 m			Drawn by T.Nilsson	Checked by	Date 2010-01-28	
Reference cad data				Part version no.		