


Compashield® splice quality requirements:



No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area12mm²**Electrial resistance measure:**

Methode: Nolato R3 Max:60 mOhm

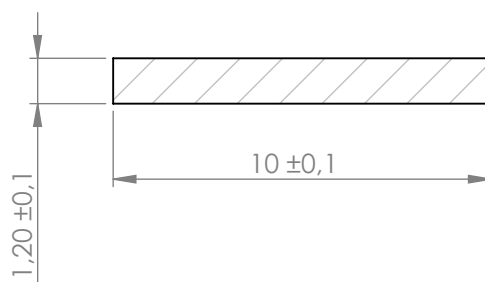

REVISIONS			Art.nr	Material	Lenght	Weight/m	Splice
REV.	DATE	DESCRIPTION	1161900	8651	Roll	28g	No

		Document name					
		Compashield Square					
		Sheet scale	Sheet size	Document no.	Rev no.	Nolato art. no.	Customer no.
		5:1	A4	P1619:10:001	B	1161900	
General tolerances				Drawn by	Checked by	Date	
SS-ISO 2768 m				T.Nilsson		2010-06-17	
Reference cad data					Part version no.		