

Compashield® splice quality requirements:



No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area

15,18



Electrial resistance measure:

Methode: Nolato R3 Max:300 mOhm

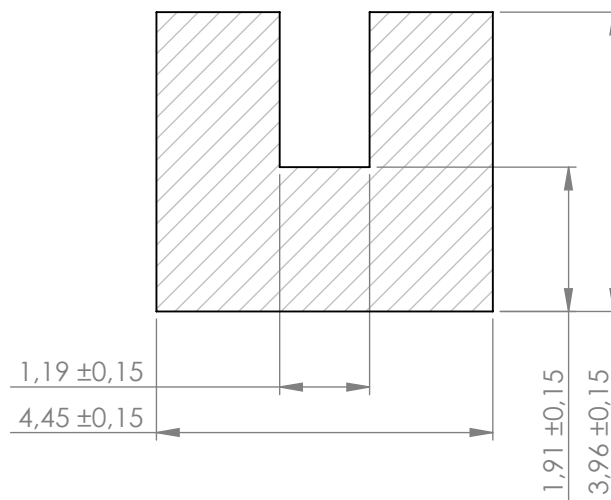

Art.nr	Material	Lenght	Weight/m	Splice
1173000	8642	Roll	20g	No

REVISIONS		
REV.	DATE	DESCRIPTION
B	130614	MInor changes

		Document name			Compashield U-shape		
		Sheet scale	Sheet size	Document no.	Rev no.	Nalato art. no.	Customer no.
		10:1	A4	1730:10:001	C	1173000	
General tolerances				Drawn by	Checked by	Date	
ISO 3302-1 M3				T.Nilsson	P.Akerberg	2010-05-10	
Reference cad data					Part version no.		