


Compashield® splice quality requirements:



No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area1,56 mm ²**Electrial resistance measure:**

Methode: Nolato R3 Max:150 mOhm

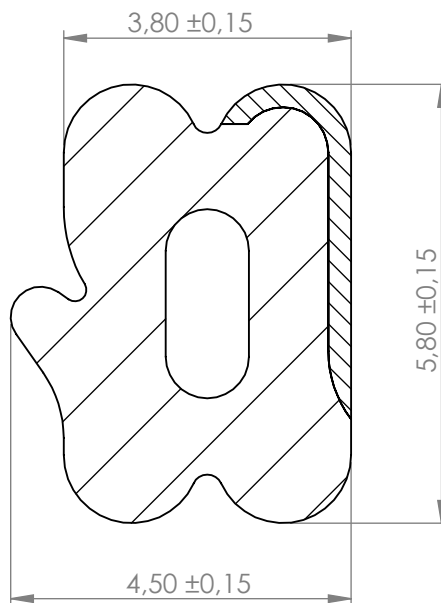

REVISIONS			Art.nr	Material	Lenght	Weight/m	Splice
REV.	DATE	DESCRIPTION	1174200	8651/1540	Roll	3,5/20 g	No
B	130527	New splicing length, new template, new material	1174201		355±5 mm		Yes
			1174202		1028±5 mm		Yes

 Nolato		Document name Compashield EE				
 1st angle projection	Sheet scale 10:1	Sheet size A4	Document no. P1742:11:001	Rev no. D	Nolato art. no. 1174200	Customer no.
General tolerances ISO 3302-1 M3			Drawn by T. Nilsson		Checked by P.Brock	Date 2011-05-25
Reference cad data					Part version no.	