


**Compashield® splice quality requirements:**



No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.  
 No flash, porosity or excess rubber at the joint after splicing.  
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.  
 Joining point should stand for 10% stretch without mechanical damage

**Cross-section area**4,91mm<sup>2</sup>**Electrial resistance measure:**

Methode: Nolato R3 Max:300 mOhm

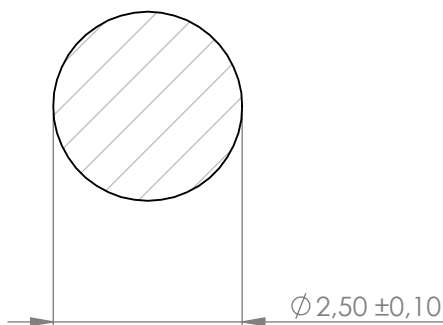

REVISIONS			Art.nr	Material	Lenght	Weight/m	Splice
REV.	DATE	DESCRIPTION	1179400	8642	Roll	10,5g	No
B	130613	Minor changes					

		Document name Compashield Solid O-shape					
		Sheet scale 10:1	Sheet size A4	Document no. P1794:11:001	Rev no. C	Nalato art. no. 1179400	Customer no.
General tolerances  ISO 3302-1 M3				Drawn by T.Nilsson		Checked by P.Akerberg	Date 2011-10-18
Reference cad data						Part version no.	