


Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area**5,31mm²****Electrial resistance measure:**

Methode: Nolato R3 Max:150 mOhm

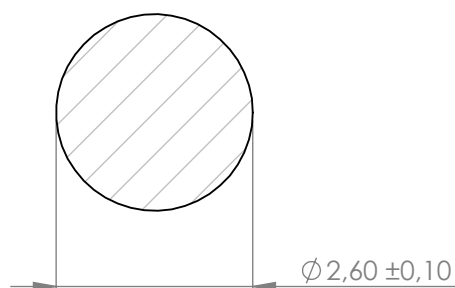

REVISIONS			Art.nr	Material	Lenght	Weight/m	Splice
REV.	DATE	DESCRIPTION	1184200	8651	Roll	12,5g	No
B	130327	Minor changes					
D	150615	Material changed					

		Document name				
		Compashield Solid O-shape				
Sheet scale	Sheet size	Document no.	Rev no.	Nolato art. no.	Customer no.	
10:1	A4	P1842:12:001	D	1184200		
General tolerances		Drawn by	Checked by		Date	
ISO 3302-1 M3		T.Nilsson	P.Åkerberg		2012-01-09	
Reference cad data				Part version no.		