


Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area5.25 mm²**Electrial resistance measure:**

Methode: Nolato R3 Max:150 mOhm

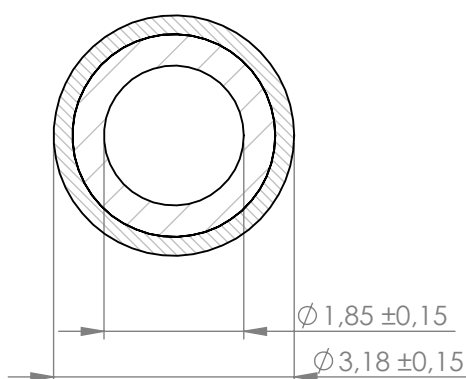


REVISIONS			Art.nr	Material	Lenght	Weight/m	Splice
REV.	DATE	DESCRIPTION	1188100	1540/8651	Roll	4g/5,5g	No
B	130327	Minor changes					
D	140619	Material changed					



Document name

Compashield Soft Hollow O-shape

 1st angle projection	Sheet scale 10:1	Sheet size A4	Document no. P1881:12:001	Rev no. D	Nolato art. no. 1188100	Customer no.
General tolerances ISO 3302-1 M3			Drawn by T.Nilsson	Checked by	Date 2012-03-08	
Reference cad data					Part version no.	