



**Compashield® splice quality requirements:**

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.  
 No flash, porosity or excess rubber at the joint after splicing.  
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.  
 Joining point should stand for 10% stretch without mechanical damage



Cross-section area

11.2mm<sup>2</sup>**Electrial resistance measure:**

Methode: Nolato R3 Max:150 mOhm

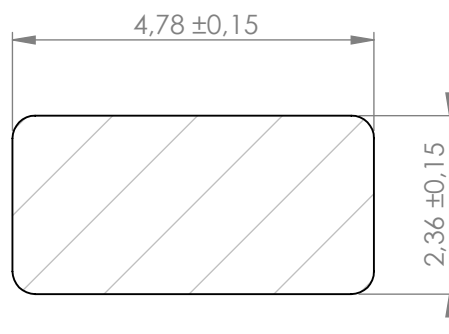

REVISIONS			Art.nr	Material	Lenght	Weight/m	Splice
REV.	DATE	DESCRIPTION	1188800	8605	Roll	26g	No
B	130327	Minor changes					

		Document name Compashield Square					
		Sheet scale 10:1	Sheet size A4	Document no. P1888:12:001	Rev no. C	Nalato art. no. 1188800	Customer no.
General tolerances  ISO 3302-1 M3			Drawn by T.Nilsson		Checked by		Date 2012-03-19
Reference cad data					Part version no.		