


Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area**4.91mm²****Electrial resistance measure:**

Methode: Nolato R3 Max:150 mOhm

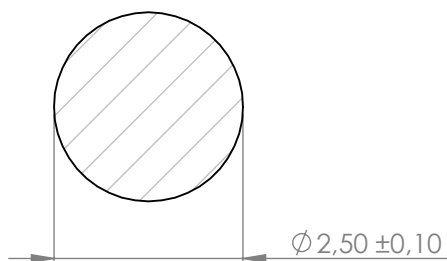

REVISIONS			Art.nr	Material	Lenght	Weight/m	Splice
REV.	DATE	DESCRIPTION	1188900	8651	Roll	10,5g	No
B	130327	Minor changes	1188901	8651	349 mm		Yes
D	150615	Material changed	1188902	8651	432 mm		Yes
			1188903	8651	532 mm		Yes

		Document name				
 1st angle projection		Compashield Solid O-shape				
Sheet scale	Sheet size	Document no.	Rev no.	Nalato art. no.	Customer no.	
10:1	A4	P1889:12:001	D	1188900		
General tolerances		Drawn by	Checked by		Date	
ISO 3302-1 M3		T.Nilsson			2012-03-28	
Reference cad data				Part version no.		