
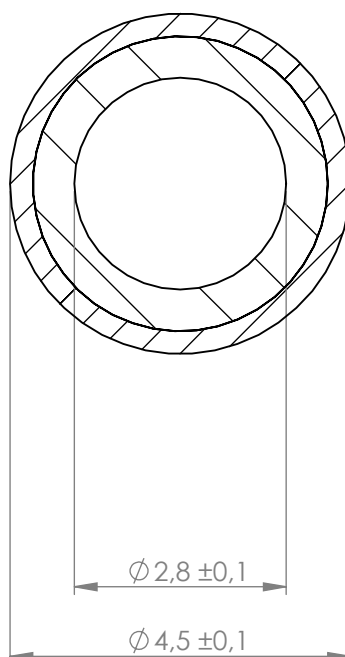


Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area3,96mm ²**Electrial resistance measure:**

Methode: Nolato R3 Max:300 mOhm




REVISIONS		
REV.	DATE	DESCRIPTION
A	120717	New drawing
B	130326	Minor changes

Art.nr	Material	Lenght	Weight/m	Splice
1193100	8648/1540	Roll	9,5g / 7g	No
1193101	8648/1540	1495mm		Yes

**Nolato**

Document name

Compashield Soft Hollow O-shape



1st angle projection

Sheet scale
10:1Sheet size
A4Document no.
P1931:12:001Rev no.
DNolato art. no.
1193100

Customer no.

General tolerances

Drawn by
P. ÅkerbergChecked by
T.NilssonDate
2012-07-10

SISO 3302-1 M3

Reference cad data

Part version no.