

**Compashield® splice quality requirements:**

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.  
No flash, porosity or excess rubber at the joint after splicing.  
Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.  
Joining point should stand for 10% stretch without mechanical damage

**Cross-section area**

3,49 mm ^2


**Electrial resistance measure:**

Methode: Nolato R3 Max:300 mOhm



Material 1540

Material 8648

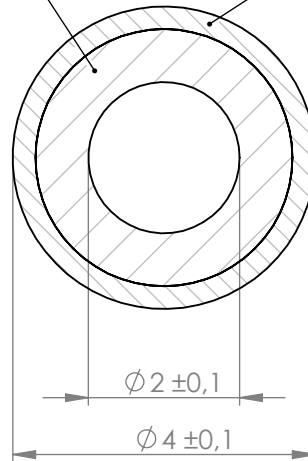

REV.   DATE		DESCRIPTION	Art.nr	Material	Lenght	Weight/m	Splice
REVISIONS			1196700	8648/1540	Roll	8,5 g / 6,5 g	No
A	121116	New drawing	1196701	8648/1540	1517 mm		Yes
B	130326	Minor changes					

		Document name <b>Compashield Soft Hollow O-shape</b>				
	Sheet scale 10:1	Sheet size A4	Document no. P1967:12:001	Rev no. C	Nalato art. no. 1196700	Customer no.
General tolerances  ISO 3302-1 M3			Drawn by P. Åkerberg		Checked by P. Brock	Date 2012-11-16
Reference cad data					Part version no.	