
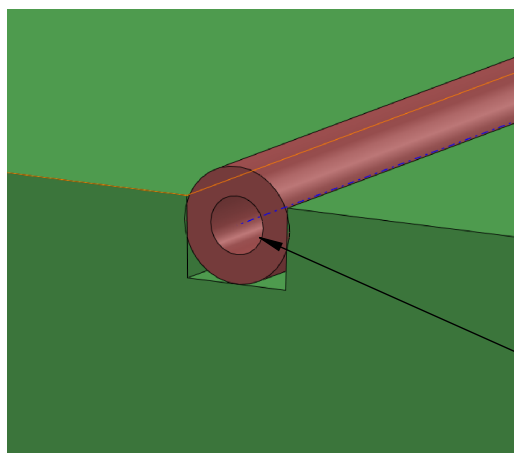



Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area5,77 mm²

Area groove 5,95 mm²
 Area nom. gasket 5,3 mm²
 Compression 3-->2,1 mm = 30%
 Some press-fit makes the gasket stay in the groove assembly.

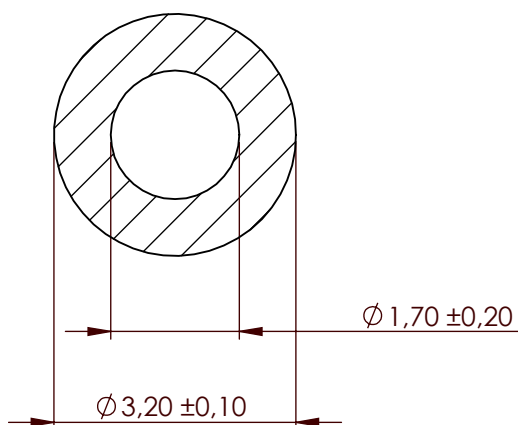


REVISIONS			Art.nr	Material	Lenght	Weight/m	Splice
REV.	DATE	DESCRIPTION	1211500	1540	Roll	6,4 g	No
A	130905	New drawing	1211501	1540	1217 ± 3 mm		Yes
B	131211	Changed dimensions and splicing lenght // OE	1211502	1540	239 ± 2 mm		Yes
			1211503	1540	958 ± 3 mm		Yes



Document name

Compashield Hollow O-shape

Sheet scale
10:1Sheet size
A4Document no.
P2115:13:001Rev no.
BNolato art. no.
1211500

Customer no.

General tolerances

Drawn by
P.ÅkerbergChecked by
P.BrockDate
2013-09-05

ISO 3302-1 M3

Reference cad data

Part version no.