


Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.

No flash, porosity or excess rubber at the joint after splicing.

Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.

Joining point should stand for 10% stretch without mechanical damage


Cross-section area9.1mm ²

3,20 ±0,10

3,63 ±0,10

Ø 1,65 ±0,10

3,50 ±0,15

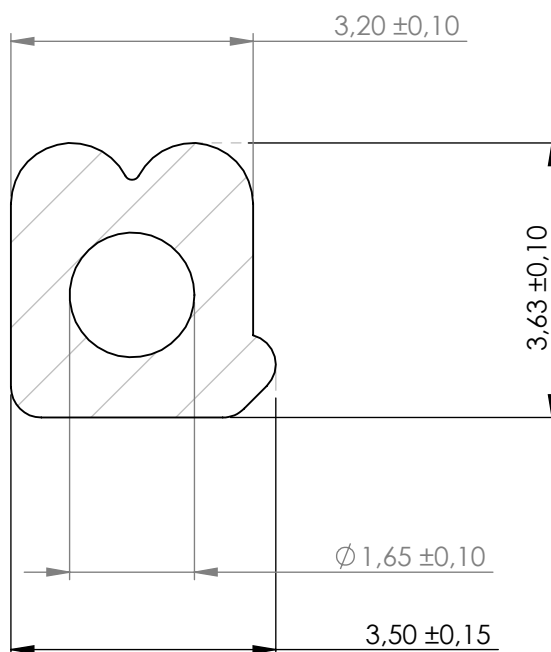

Art.nr	Material	Lenght	Weight/m	Splice
1213900	1540	Roll	21 g	No

REVISIONS		
REV.	DATE	DESCRIPTION



Document name

Compashield Special Profile

 1st angle projection	Sheet scale 10:1	Sheet size A4	Document no. P2139:13:001	Rev no. B	Nolato art. no. 1213900	Customer no.
General tolerances ISO 3302-1 M3			Drawn by S.Muhonen	Checked by P.Brock	Date 2013-11-07	
Reference cad data					Part version no.	