


Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area11.84 mm²**Electrial resistance measure:**

Methode: Nolato R3 Max:300 mOhm

Anti-stretch feature

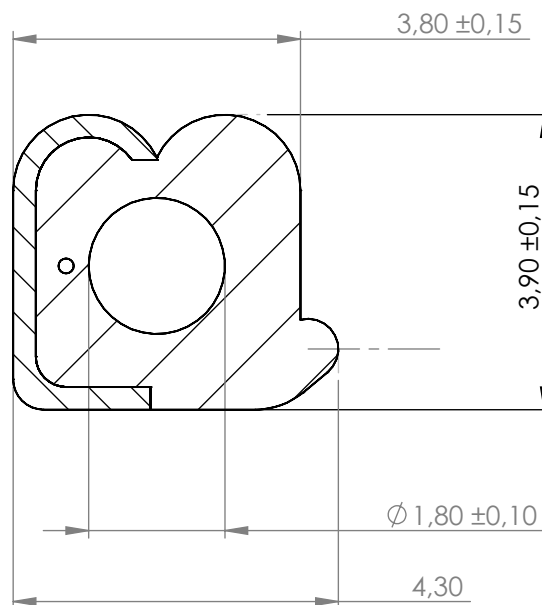

Art.nr	Material	Lenght	Weight/m	Splice
1218500	8648 /1540	Roll	5,5g / 12g	No
1218501		215 ±2 mm		Yes
1218502		917 ±2 mm		Yes
1218503		1102 ±4 mm		Yes
1218504		702 ±3 mm		Yes
1218505		623 ±3 mm		Yes
1218506		1807 ±5 mm		Yes


REVISIONS

REV.	DATE	DESCRIPTION



Document name

Compashield EE-gasket + Antistretch



1st angle projection

Sheet scale
10:1Sheet size
A4Document no.
P2185:14:001Rev no.
DNolato art. no.
1218500

Customer no.

General tolerances

Drawn by
S.MuhonenChecked by
P.BrockDate
2014-02-14

ISO 3302-1 M3

Reference cad data

Part version no.