



Cross-section area

Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
No flash, porosity or excess rubber at the joint after splicing.
Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
Joining point should stand for 10% stretch without mechanical damage


Electrial resistance measure:


Methode: Nolato R3 Max: 150 mOhm
Methode: Nolato R7 Max: ---- mOhm

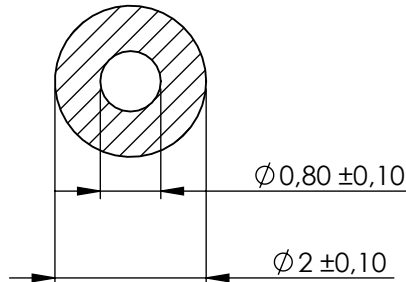

Art.nr	Material	Lenght	Weight/m	Splice
1219400	8651	Roll	6g	

REVISIONS		
REV.	DATE	DESCRIPTION

 **Nolato** Document name: 2194 Compashield Hollow O-Shape

	Sheet scale 10:1	Sheet size A4	Document no. P2194:14:001	Rev no. A	Nalato art. no. 1219400	Customer no.
General tolerances ISO 3302-1 M3			Drawn by T.Nilsson	Checked by	Date 2014-03-18	
Reference cad data					Part version no.	