

1

2

3

4


Compashield® splice quality requirements:

No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Electrial resistance measure:

Methode: Nolato R3 Max: 150 mOhm
 Methode: Nolato R7 Max: ---- mOhm

Cross-section area



A

A

B


B

C

C

D

D

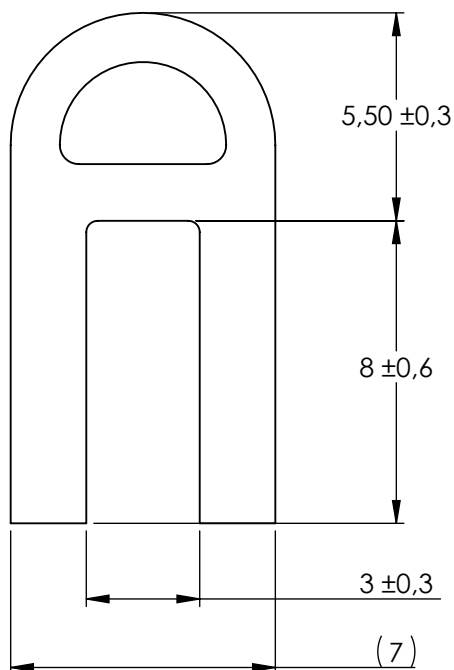

E

E

Art.nr	Material	Length	Weight/m	Splice
1225300	8642	Roll	117g	


REV.	DATE	DESCRIPTION

REVISIONS



Document name

Compashield Special Profile (Exhaust sensor)



1st angle projection

Sheet scale

5:1

Sheet size

A4

Document no.

P2253:14:001

Rev no.

A

Nalato art. no.

1225300

Customer no.

General tolerances

ISO 3302-1 M3

Drawn by

T.Nilsson

Checked by

Date

2014-07-10

Reference cad data

Part version no.

F

F

1

2

3

4