

Compashield® splice quality requirements:



No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
No flash, porosity or excess rubber at the joint after splicing.
Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
Joining point should stand for 10% stretch without mechanical damage

Electrial resistance measure:

Method: Nolato R3 Max: 300 mOhm



Assembly Instruction:

Gasket shall be assembled so the alignment lines are at side of gasket when compressed.

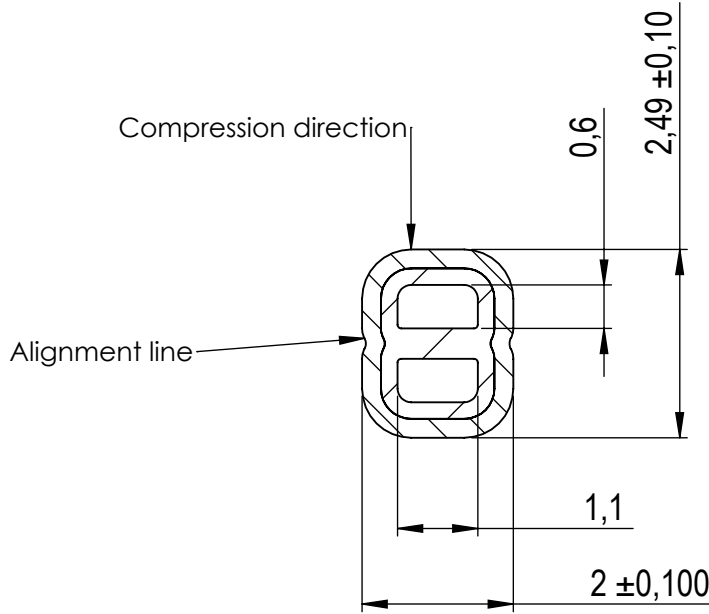

>Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

REV.	DATE	DESCRIPTION	Art.nr	Material	Length	Weight/m	Splice
REVISIONS			1243200	8648/1540	Roll	4,5/ 2 gr	No
			1243201		TBD		Yes

	Document name CompaShield Hollow Square Soft				
		Sheet scale 10:1	Sheet size A4	Document no. P2432:15:001	Rev no. A
General tolerances SS ISO 3302-1 M3			Drawn by S.Muhonen	Checked by O.Edholm	Date 2015-05-05
Reference cad data					