


Compashield® splice quality requirements:



No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
 No flash, porosity or excess rubber at the joint after splicing.
 Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
 Joining point should stand for 10% stretch without mechanical damage

Cross-section area4.74 mm²**Electrial resistance measure:**

Method: Nolato R3 Max: 300 mOhm

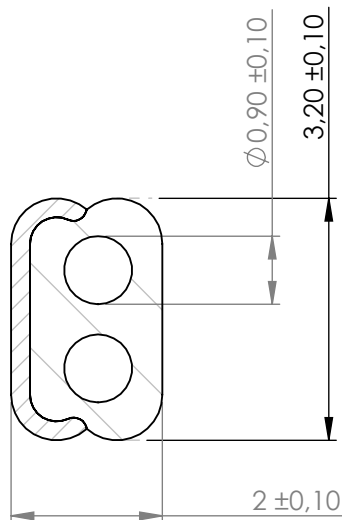

REVISIONS			Art.nr	Material	Length	Weight/m	Splice
REV.	DATE	DESCRIPTION	1246200	8651 /1540	Roll	2,6g / 4,4g	No
			1246201		440±2		Yes

		Document name					
		Compashield EE-Gasket					
		Sheet scale	Sheet size	Document no.	Rev no.	Nalato art. no.	Customer no.
		10:1	A4	P2462:15:001	A	1246200	
General tolerances			Drawn by		Checked by		Date
ISO 3302-1 M3			K.Muhonen		S.Muhonen		2015-06-29
Reference cad data						Part version no.	