

Compashield® splice quality requirements:


No reduction of the shielding properties in the splicing area. Splicing rubber thin and conductive.
No flash, porosity or excess rubber at the joint after splicing.
Max increase of compression force in the splicing area 5%. No excess splicing rubber inside hollow profiles.
Joining point should stand for 10% stretch without mechanical damage

Cross-section area

2,49mm²

Electrial resistance measure:

Methode: Nolato R3 Max:150 mOhm

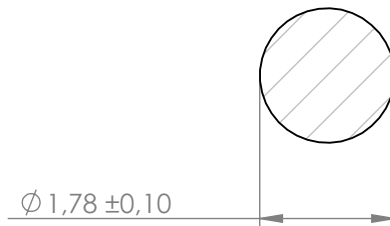

REVISIONS			Art.nr	Material	Lenght	Weight/m	Splice
REV.	DATE	DESCRIPTION	1186200	8651	Roll	5,5g	No

		Document name Compashield Solid O-shape				
	Sheet scale 10:1	Sheet size A4	Document no. P1862:12:001	Rev no. C	Nolato art. no. 1186200	Customer no.
General tolerances ISO 3302-1 M3			Drawn by T.Nilsson		Checked by	Date 2012-02-23
Reference cad data				Part version no.		